7SR220 Directional Relay Instrumentation Guide

(Software Version 2435H85009R7a-7a)

The copyright and other intellectual property rights in this document, and in any model or article produced from it (and including any registered or unregistered design rights) are the property of Siemens Protection Devices Limited. No part of this document shall be reproduced or modified or stored in another form, in any data retrieval system, without the permission of Siemens Protection Devices Limited, nor shall any model or article be reproduced from this document unless Siemens Protection Devices Limited consent.

While the information and guidance given in this document is believed to be correct, no liability shall be accepted for any loss or damage caused by any error or omission, whether such error or omission is the result of negligence or any other cause. Any and all such liability is disclaimed.



Document Release History


This document is issue 2011/05.

2011/05	First issue
---------	-------------


Contents

D	ocument Release History	2
	Function Diagram	
	•	
2.	Menu Structure	5
1.	Relay Instrumentation	6
	1.1. Favourite Meters	6
	1.2. Current Meters	6
	1.3. Voltage Meters	7
	1.4. Frequency Meters	7
	1.5. Power Meters	8
	1.6. Energy Meters	8
	1.7. Directional Meters	
	1.8. Thermal Meters	
	1.9. Auto-Reclose Meters	
	1.10. Maintenance Meters	
	1.11. Genera Alarm Meters	
	1.12. Demand Meters	
	1.13. Binary Input Meters	
	1.14. Binary Output Meters	
	1.15. Virtual Meters	
	1.16. Communication Meters	
	1.17. Miscellaneous Meters	
	1 18 Quick Logic Meters	12

1.Function Diagram

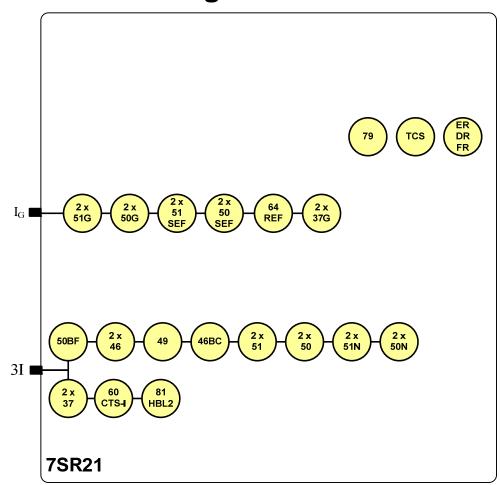

2.Menu Structure

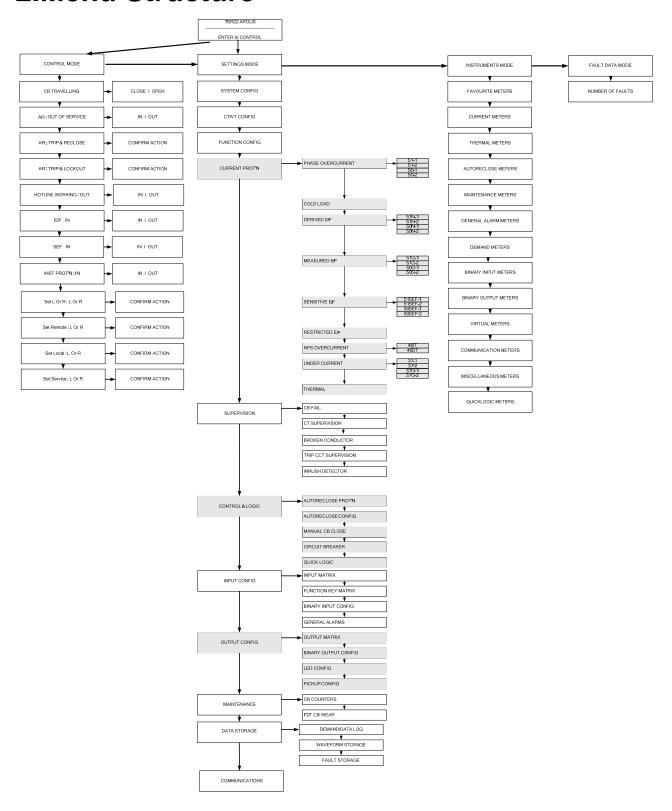

1. Relay Instrumentation

1.1. Favourite Meters

Instrument	Description
FAVOURITE METERS > to view	This allows the user to view his previously constructed list of 'favourite meters' by pressing TEST/RESET ▶ button and the READ DOWN button to scroll though the meters added to this sub-group
	To construct a sub-group of favourite meters, first go to the desired meter then press ENTER this will cause a message to appear on the LCD 'Add To Favourites YES pressing ENTER again will add this to the FAVOURITE METERS Sub-menu. To remove a meter from the FAVOURITE METERS sub-menu go to that meter each in the FAVOURITE METERS sub-menu or at its Primary location press ENTER and the message 'Remove From Favourites' will appear press ENTER again and this meter will be removed from the FAVOURITE METERS sub-group

1.2. Current Meters

Instrument		Description
CURRENT METERS > to view		This is the sub-group that includes all the meters that are associated with Current TEST/RESET ▶ allows access to this sub-group
Primary Current la 0.00 lb 0.00 lc 0.00	DΑ	Displays the 3 phase currents Primary RMS values
Secondary Curren la 0.00 lb 0.00 lc 0.00	DA DA	Displays the 3 phase currents Secondary RMS values
Nom Current Ia 0.00xIn° Ib 0.00xIn° Ic 0.00xIn°		Displays the 3 phase currents Nominal RMS values & phase angles with respect to PPS current.
Pri Earth Current In 0.000A Ig 0.000A		Displays the 3 Earth currents Primary RMS values
Sec Earth Current In 0.00 Ig 0.00	00A	Displays the 3 Earth currents Secondary RMS values
	it 00xIn° 00xIn°	Displays the 3 Earth currents Nominal RMS values & phase angles with respect to PPS current.
lpps 0.00	s)xln°)xln°)xln°	Displays the Current Sequence components Nominal RMS values & phase angles with respect to PPS current.
2 nd Harmonic Curr la 0.00 lb 0.00 lc 0.00)xln)xln	Displays the 3 phase currents 2 nd Harmonic components Nominal RMS values.

1.3. Voltage Meters

VOLTAGE METERS > to view		This is the sub-group that includes all the meters that are associated with Voltage TEST/RESET ▶ allows access to this sub-group
Prim Ph-Ph	•	Displays the Phase to Phase Voltage Primary RMS values
Vab	0.00V	
Vbc	0.00V	
Vca	0.00V	
Sec Ph-Ph	-	Displays the Phase to Phase Voltage Secondary RMS values & Angles
Vab	0.00V	with respect to PPS voltage.
Vbc	0.00V	
Vca	0.00V	
	n-Ph Voltage	Displays the Phase to Phase Voltage Nominal RMS values
Vab	0.00xVno	
Vbc	0.00xVno	
Vca	0.00xVno	
Prim Ph-N	Voltage	Displays the Phase to Neutral Voltage Primary RMS values
Va	0.00V	., .,
Vb	0.00V	
Vc	0.00V	
Sec Ph-N V	/oltage	Displays the Phase to Neutral Voltage Secondary RMS values & Angles
Va	0.00V	with respect to PPS voltage.
Vb	0.00V	
Vc	0.00V	
Nom Ph-N	Voltage	Displays the Phase to Neutral Voltage Nominal RMS values
Va	0.00xVno	Displays the Fridate to Neutral Voltage Norminal Nivio Values
Vb	0.00xVno	
Vc	0.00xVno	
V Seq Com	ponents	Displays the Voltage Sequence components Nominal RMS values & phase
Izps	0.00Vo	angles with respect to PPS voltage.
Ipps	0.00Vo	
Inps	0.00Vo	
Calc Earth	Voltage	Displays the calculated Earth voltage both primary and secondary which
Pri	0.00V	also shows the secondary angle
Sec	0.00Vo	, ,
CS/NVD Voltage (Vx)		Displays the 4th voltage (Vx) both primary and secondary which also
Pri	0.00V	shows the secondary angle. This voltage can be used for NVD, Vx 27/59
Sec	0.00Vo	or where available Checksync.

1.4. Frequency Meters

Instrument	Description
FREQUENCY METERS > to view	This is the sub-group that includes all the meters that are associated with Frequency TEST/RESET ▶ allows access to this sub-group
Frequency 0.000Hz	Displays the power system frequency.

1.5. Power Meters

Instrument		Description
POWER METERS > to view		This is the sub-group that includes all the meters that are associated with Power TEST/RESET ▶ allows access to this sub-group
Phase A Phase B	0.0W 0.0W	Displays Real Power
Phase C P (3P)	0.0W 0.0W	
Phase A	0.0VAr	Displays Reactive Power
Phase B	0.0VAr	Displays (Cacave) ower
Phase C	0.0VAr	
Q (3P)	0.0VAr	
Phase A	0.0VA	Displays Apparent Power
Phase B	0.0VA	Displaye / pparsitir swell
Phase C	0.0VA	
S (3P)	0.0VA	
PF A	0.00	Displays Power factor
PF B	0.00	2.56.375 . 3.13 30.07
PF C	0.00	
PF (3P)	0.00	

1.6. Energy Meters

Instrument	Description
ENERGY METERS > to view	This is the sub-group that includes all the meters that are associated with Energy TEST/RESET ▶ allows access to this sub-group
Active Energy Exp 000000x10kWh Imp 000000x10kWh	Displays both imported and exported Active Energy
Reactive Energy Exp 000000x10kVArh Imp 000000x10kVArh	Displays both imported and exported Reactive Energy

1.7. Directional Meters

Instrument	Description
DIRECTIONAL METERS > to view	This is the sub-group that includes all the meters that are associated with Directional elements TEST/RESET ▶ allows access to this sub-group. Only seen on models that have the 67 option
P/F Dir (67)	The appropriate values from the selection will be displayed.
No Dir	No Dir, PhA Fwd, PhA Rev, PhB Fwd, PhB Rev, PhC Fwd, PhC Rev
Calc E/F Dir (67N)	The appropriate values from the selection will be displayed.
No Dir	No Dir, E/F Fwd, E/F Rev
Meas E/F Dir (67G)	The appropriate values from the selection will be displayed.

	No Dir	No Dir, E/F Fwd, E/F Rev
SEF Dir (67SEF)		The appropriate values from the selection will be displayed.
	No Dir	No Dir, SEF Fwd, SEF Rev

1.8. Thermal Meters

Instrument		Description
 THERMAL METERS > to view		This is the sub-group that includes all the meters that are associated with Thermal TEST/RESET ▶ allows access to this sub-group
Thermal Status		Displays the thermal capacity
Phase A	0.0%	Dioplaye are aremar supusity
Phase B	0.0%	
Phase C	0.0%	

1.9. Auto-Reclose Meters

Instrument	Description
AUTORECLOSE METERS > to view	This is the sub-group that includes all the meters that are associated with Autoreclose TEST/RESET ▶ allows access to this sub-group. Only seen on models that have the 79 option
Autoreclose Status Out Of Service	Status of the autoreclose.
Close Shot 0	

1.10. Maintenance Meters

Instrument		Description
MAINTENANCE METERS > to view		This is the sub-group that includes all the meters that are associated with Maintenance TEST/RESET ▶ allows access to this sub-group
CB Total Trip	s	Displays the number of CB trips experienced by the CB
Count	0	
Target	100	
CB Delta Trip	os	Displays the number of CB trips experienced by the CB
Count	0	The purpose of the state of the
Target	100	
CB Count To	AR Block	Displays the number of CB trips experienced by the CB. When the target is
Count	0	reached the relay will only do 1 Delayed Trip to Lockout.
Target	100	
CB Freq Ops	Count	Displays the number of CB trips experienced by the CB over the last rolling 1
Count	0	hr period. When the target is reached the relay will only do 1 Delayed Trip to
Target	10	Lockout.
CB Wear		Displays the current measure of circuit breaker wear.
Phase A	0.00MA^2s	Displays the suffern measure of sirout breaker wear.
Phase B	0.00MA^2s	
Phase C	0.00MA^2s	

Instrument	Description
CB Trip Time 0.0ms	Displays the trip time for the circuit breaker.

1.11. Genera Alarm Meters

Instrument	Description
GENERAL ALARM METERS > to view	This is the sub-group that includes all the meters that are associated with the Binary inputs TEST/RESET ▶ allows access to this sub-group
General Alarms	Displays the state of General Alarm
ALARM 1 Cleared	
•••	
General Alarms	
ALARM 12 Cleared	

1.12. Demand Meters

Instrument		Description
DEMAND METERS > to view		This is the sub-group that includes all the meters that are associated with the demand metering. TEST/RESET ▶ allows access to this sub-group
I Phase A Dem	and	Shows the Max, Min and Mean for Phase A.
Max	0.00A	onowo the max, min and mean of this of the
Min	0.00A	
Mean	0.00A	
I Phase B Dem	and	Shows the Max, Min and Mean for Phase B.
Max	0.00A	
Min	0.00A	
Mean	0.00A	
I Phase C Dem	and	Shows the Max, Min and Mean for Phase C.
Max	0.00A	onowo the max, min and mean of this est
Min	0.00A	
Mean	0.00A	
Power P 3P De	emand	Shows the Max, Min and Mean for Power P 3P Demand.
Max	0.00W	
Min	0.00W	
Mean	0.00W	
Power Q 3P Demand		Shows the Max, Min and Mean for Power Q 3P Demand.
Max	0.00VAr	
Min	0.00VAr	
Mean	0.00VAr	
Power S 3P Demand		Shows the Max, Min and Mean for Power S 3P Demand.
Max	0.00VA	
Min	0.00VA	
Mean	0.00VA	

1.13. Binary Input Meters

Instrument	Description
BINARY INPUT METERS > to view	This is the sub-group that includes all the meters that are associated with the Binary inputs TEST/RESET ▶ allows access to this sub-group
BI 1-8 BI 9-9 -	Displays the state of DC binary inputs 1 to 9 (The number of binary inputs may vary depending on model)

1.14. Binary Output Meters

Instrument	Description
BINARY OUTPUT METERS > to view	This is the sub-group that includes all the meters that are associated with the Binary Outputs TEST/RESET ▶ allows access to this sub-group
BO 1-8	Displays the state of DC binary Outputs 1 to 8. (The number of binary outputs may vary depending on model)

1.15. Virtual Meters

Instrument	Description
VIRTUAL METERS > to view	This is the sub-group that shows the state of the virtual status inputs in the relay TEST/RESET ▶ allows access to this sub-group
V 1-8 V 9-16	Displays the state of Virtual Outputs 1 to 16 (The number of virtual inputs will vary depending on model)

1.16. Communication Meters

Instrument		Description
COMMUNICATION METERS > to view		This is the sub-group that includes all the meters that are associated with Communications ports TEST/RESET ▶ allows access to this sub-group
COM1		Displays which com ports are currently active
COM2		
COM3		
COM4		
COM1 TRAFFIC		Displays traffic on Com1
Tx1	0	Displays traine on comm
Rx1	0	
Rx1 Errors	0	

Instrument		Description
COM2 TRAFFIC		Displays traffic on Com2
Tx2	0	Displaye dame on come
Rx2	0	
Rx2 Errors	0	
COM3 TRAFFIC		Displays traffic on Com3
Tx3	0	Bioplays traine on some
Rx3	0	
Rx3 Errors	0	
COM4 TRAFFIC		Displays traffic on Com4
Tx4	0	Displaye dame on contr
Rx4	0	
Rx4 Errors	0	

1.17. Miscellaneous Meters

Instrument	Description
MISCELLANEOUS METERS > to view	This is the sub-group that includes indication such as the relays time and date, the amount of fault and waveform records stored in the relay TEST/RESET ▶ allows access to this sub-group
Date 01/01/2000	This meter displays the date and time and the number of Fault records and
Time 22:41:44	Event records stored in the relay
Waveform Recs 0	
Fault Recs 0	
Event Recs 0	
Data Log Recs 0	

1.18. Quick Logic Meters

Instrument			Description
QUICK LOGIC METERS > to view			This is the sub-group that includes all the meters that are associated with QuickLogic. TEST/RESET ▶ allows access to this sub-group
E 1-8			Shows the state of all the equations
E 9-16			
E1 Equation			Shows the state of an individual equation. EQN shows the equation state.
EQN		=0	TMR shows the timer progress and state for the equation. CNT shows the
TMR	0-0	=0	count progress and state for the equation.
CNT	0-1	=0	
E16 Equation			Shows the state of an individual equation. EQN shows the equation state.
EQN		=0	TMR shows the timer progress and state for the equation. CNT shows the
TMR	0-0	=0	count progress and state for the equation.
CNT	0-1	=0	

