


ODSLR 96B


Optical laser distance sensors

en 05-2012/11 5 0110336



60 ... 2000 mm

- Reflection-independent distance information
- Highly insensitive to extraneous light
- Analog current or voltage output
- PC/OLED display and membrane keyboard for configuration
- Measurement value is indicated in mm on OLED display
- Measurement range and mode adjustable
- Teachable switching output and analog output

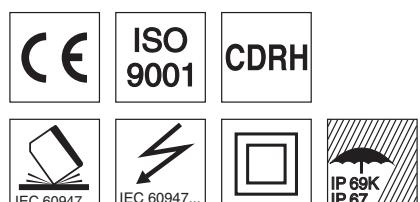


Accessories:



(available separately)

- Mounting systems
- Cable with M12 connector (K-D ...)
- Configuration software

Dimensioned drawing

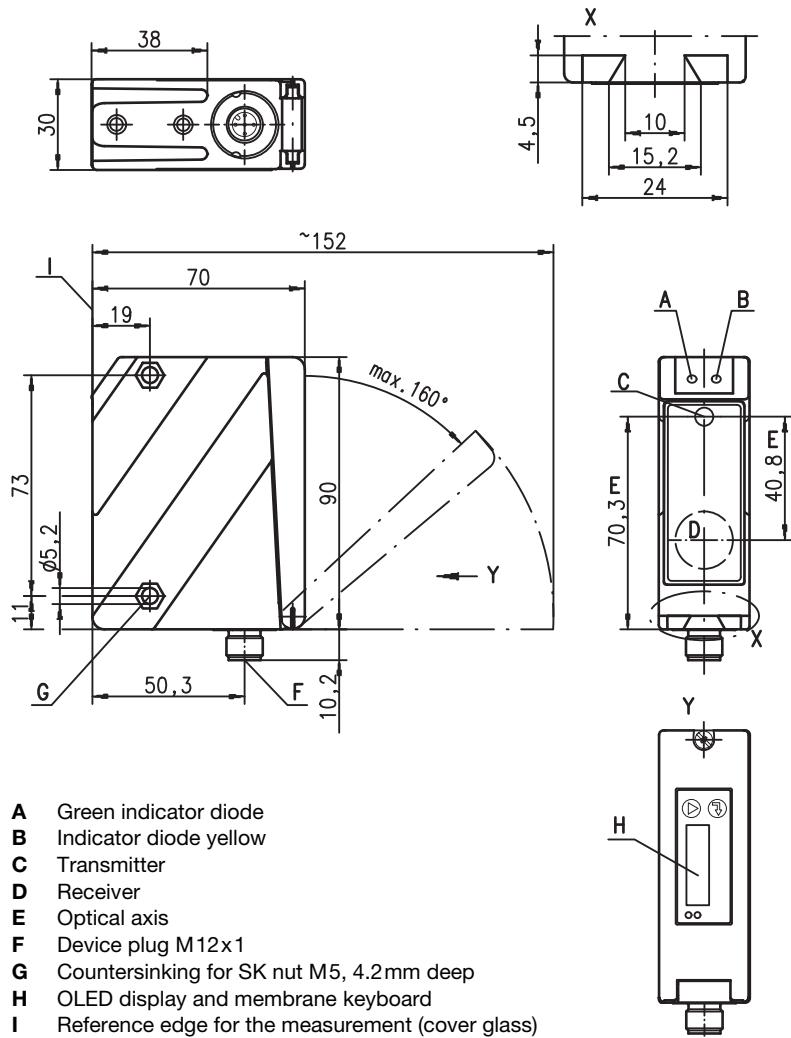

Electrical connection

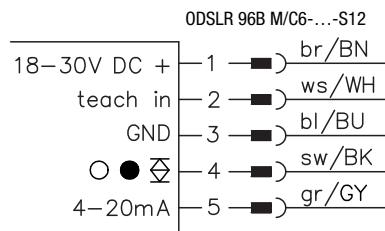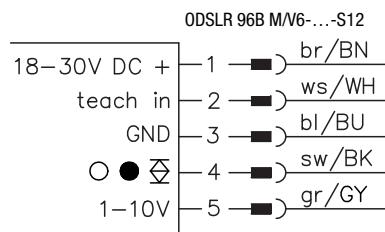

We reserve the right to make changes • DS_ODSLR96BMCV62000_en_50110336.fm

Specifications

Optical data

Measurement range ¹⁾	60 ... 2000mm
Resolution ²⁾	1 ... 5mm
Light source	red light laser/LED
Wavelength	laser 655 nm/LED 635 nm (visible red light)
Light spot	divergent, $2 \times 6 \text{ mm}^2$ at 2m LED approx. $15 \times 15 \text{ mm}^2$ at 200mm
Laser warning notice	see Remarks

Error limits (relative to measurement distance)

Absolute measurement accuracy ¹⁾	$\pm 2\% 60 \dots 200\text{mm} / \pm 1.5\% 200 \dots 2000\text{mm}$
Repeatability ³⁾	$\pm 0.5\%$
B/W detection thresh. (6 ... 90% rem.)	$\leq 1\%$
Temperature compensation	yes ⁴⁾

Timing

Measurement time	1 ... 5 ¹⁾ ms
Response time ¹⁾	$\leq 15\text{ms}$
Delay before start-up	$\leq 300\text{ms}$

Electrical data

Operating voltage U_B	18 ... 30VDC (incl. residual ripple)
Residual ripple	$\leq 15\%$ of U_B
Open-circuit current	$\leq 150\text{mA}$
Switching output	push-pull switching output ⁵⁾ , PNP light switching, NPN dark switching $\geq (U_B - 2\text{ V})/2\text{V}$
Signal voltage high/low	voltage 1 ... 10V, $R_L \geq 2\text{k}\Omega$
Analog output	current 4 ... 20mA, $R_L \leq 500\Omega$

Indicators

	Teach-in on GND	Teach-in on $+U_B$
Green LED	continuous light flashing off	ready fault no voltage
Yellow LED	continuous light flashing off	object inside teach-in measurement distance teach event object outside teach-in measurement distance


Mechanical data

Housing	diecast zinc
Optics cover	glass
Weight	380g
Connection type	M12 connector

Environmental data

Ambient temp. (operation/storage)	-20°C ... +50°C / -30°C ... +70°C
Protective circuit ⁶⁾	1, 2, 3
VDE safety class ⁷⁾	II, all-insulated
Protection class	IP 67, IP 69K ⁸⁾
Laser class	2 (acc. to EN 60825-1)
Standards applied	IEC 60947-5-2

- 1) Luminosity coefficient 6% ... 90%, complete measurement range, at 20°C, medium range of U_B , measurement object $\geq 50 \times 50 \text{ mm}^2$
- 2) Minimum and maximum value depend on measurement distance
- 3) Same object, identical environmental conditions, measurement object $\geq 50 \times 50 \text{ mm}^2$
- 4) Typ. $\pm 0.02\%/\text{K}$
- 5) The push-pull switching outputs must not be connected in parallel
- 6) 1=transient protection, 2=polarity reversal protection, 3=short circuit protection for all outputs
- 7) Rating voltage 250VAC, with cover closed
- 8) IP 69K test in accordance with DIN 40050 part 9 simulated, high pressure cleaning conditions without the use of additives. Acids and bases are not part of the test

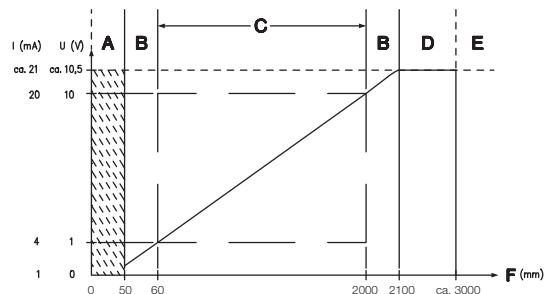

- A Area not defined
- B Linearity not defined
- C Measurement range
- D Object present
- E No object detected
- F Measurement distance

Order guide

Designation

Part no.

With M12 connector

Current output	ODSLR 96B M/C6-2000-S12	501 06732
Voltage output	ODSLR 96B M/V6-2000-S12	501 06733

ODSLR 96B M/C6-2000-S12 - 05
ODSLR 96B M/V6-2000-S12 - 05

Tables

Diagrams

Remarks

- Measurement time depends on the reflectivity of the measurement object and on the measurement mode.
- **Approved purpose:** The ODSL96B distance sensors are optoelectronic sensors for the optical, contactless measurement of distance to objects.

