


**RTR 25B**

**Energetic diffuse reflection light scanner**

Part No. 501 08924




**Dimensioned drawing**

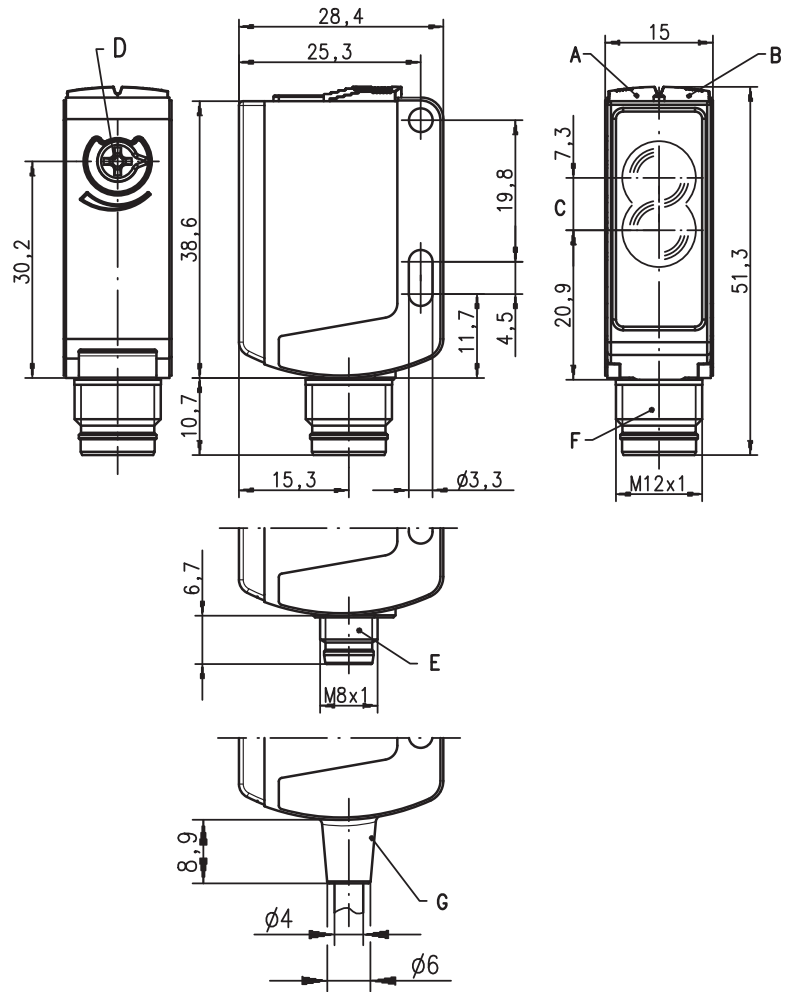


- A Indicator diode green
- B Indicator diode yellow
- C Optical axis
- D Scanning range adjustment
- E Connector M8x1
- F Connector M12x1
- G Cable

**Electrical connection**

RTR 25B/66-S12

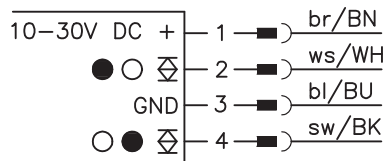


**10 ... 650mm**



- Diffuse reflection light scanner with visible red light
- Small and compact construction with robust plastic housing, protection class IP 67/ IP 69K for industrial application
- Fast alignment through *brightVision*®
- A²LS - Active Ambient Light Suppression
- Push-pull switching outputs
- High switching frequency for detection of fast events
- Scanning range adjustment

We reserve the right to make changes • 25B\_d01\_gb.fm

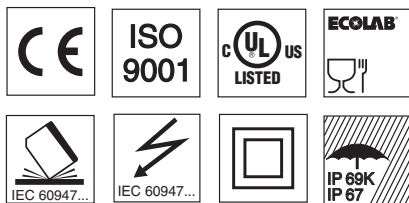

**Accessories:**

- (available separately)
- Mounting systems (BT 25, UMS 25...)
  - Cable with M8 or M12 connector (K-D ...)

## Specifications

### Optical data

Typ. scanning range limit <sup>1)</sup>	10 ... 650 mm
Scanning range <sup>2)</sup>	see tables
Light source <sup>3)</sup>	LED (modulated light)
Wavelength	620nm (visible red light, polarised)

### Timing

Switching frequency	500Hz
Response time	1 ms
Delay before start-up	≤ 300ms

### Electrical data

Operating voltage $U_B$ <sup>4)</sup>	10 ... 30VDC (incl. residual ripple)
Residual ripple	≤ 15% of $U_B$
Bias current	≤ 20mA
Switching output <sup>5)</sup>	.../66
Function characteristics	2 push-pull switching outputs
Signal voltage high/low	light/dark switching
Output current	≥ ( $U_B - 2V$ ) / ≤ 2V
Scanning range	max. 100mA adjustable with potentiometer

### Indicators

Green LED	ready
Yellow LED	reflection (object detected)

### Mechanical data

Housing	plastic (PC-ABS)
Optics cover	plastic (PMMA)
Weight	with connector: 15g with 200mm cable and connector: 30g with 2m cable: 55g
Connection type	cable 2m (cross section 4x0.21 mm <sup>2</sup> ), connector M8 or M12, cable 0.2m with connector M8 or M12

### Environmental data

Ambient temp. (operation/storage)	-30°C ... +55°C / -30°C ... +60°C
Protective circuit <sup>6)</sup>	2, 3
VDE safety class <sup>7)</sup>	II
Protection class	IP 67, IP 69K
LED class	1 (acc. to EN 60825-1)
Standards applied	IEC 60947-5-2
Certifications	UL 508 <sup>4)</sup>

- 1) Typ. scan. range limit/adjustment range: max. achievable scanning range/adjustment range for light objects (white 90%)
- 2) Scanning range: recommended scanning range for objects with different diffuse reflection
- 3) Average life expectancy 100,000h at an ambient temperature of 25°C
- 4) For UL applications: for use in class 2 circuits according to NEC only
- 5) The push-pull switching outputs must not be connected in parallel
- 6) 2=polarity reversal protection, 3=short-circuit protection for all transistor outputs
- 7) Rating voltage 50V

## Tables

1	10	600	650
2	20	200	220
3	30	130	140

1	white 90%
2	grey 18%
3	black 6%

- Scanning range [mm]
- Typ. scanning range limit [mm]

## Diagrams

## Remarks

- **Approved purpose:**  
The light scanners are optical electronic sensors for optical, contactless detection of objects.
- With the set scanning range, a tolerance of the scanning range limits is possible depending on the reflection properties of the material surface.
- Sensor particularly well suited for distinguishing between light and dark objects.

**Order guide**

Selection table		Order code →	RTR 25B/66-S12 Part No. 501 084726
Equipment ↓			
Switching output	2 x Push-pull switching output	●	
	1 x PNP output		
	2 x PNP output		
Switching function	1 PNP light switching and NPN dark switching output	●	
	1 PNP dark switching and NPN light switching output	●	
	1 x PNP light switching output		
	1 x PNP dark switching output		
	1 warning output		
Connection	M8 connector, 4-pin		
	M12 connector, 4-pin	●	
	cable 2.000mm		
	cable 200mm with M8 connector, 4-pin		
	cable 200mm with M12 connector, 4-pin		
Indicators	green LED: ready	●	
	yellow LED: light path free	●	
Options	scanning range adjustment via potentiometer		
	activation input		
	for direct connection to AS-i I/O coupling modules		

